

»Combi duplex« bale fork

- » Fully galvanized version
- » Version with or without extension
- » For transporting two round or square bales
- » With heavy welded-in tapered bushings
- » With two round bale tines as standard

Illustration without extension

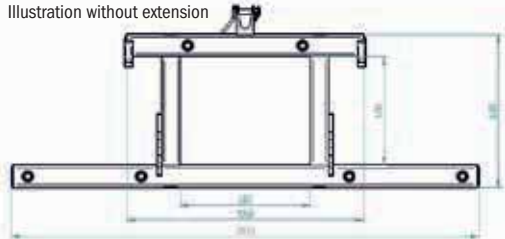


Illustration with extension

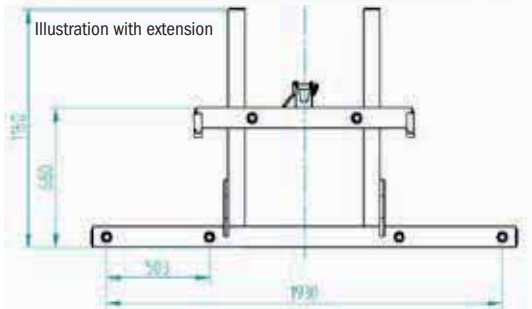


Illustration: bale fork with extension and six round bale tines

For attachment to Euronorm mounting and three-point hitch

Art.no.	Version	Weight approx.	Tine length	Thread	Qty.
BGAFLM000005V	Without extension	125 kg	1000 mm	M28 x 1.5	Pcs.
BGAFLM000007V	Without extension	130 kg	1100 mm	M28 x 1.5	Pcs.
BGAFLM000008V	With extension 500 mm	135 kg	1000 mm	M28 x 1.5	Pcs.
BGAFLM000009V	With extension 500 mm	140 kg	1100 mm	M28 x 1.5	Pcs.
BGAFLM900002	Socket pipes for »Combi« bale fork for transporting 3-4 square bales				Pcs.

For attachment to farm, wheel or telescopic loaders

Art.no.	Version	Weight approx.	Tine length	Thread	Qty.
BGAHRT000005V	Without extension	135 kg	1000 mm	M28 x 1.5	Pcs.
BGAHRT000007V	Without extension	140 kg	1100 mm	M28 x 1.5	Pcs.
BGAHRT000008V	With extension 500 mm	145 kg	1000 mm	M28 x 1.5	Pcs.
BGAHRT000009V	With extension 500 mm	150 kg	1100 mm	M28 x 1.5	Pcs.