


»Standard« high capacity bucket

1176 mm deep, 1025 mm high

- » Material thicknesses: Shell plate 4 mm, side plate 5 mm, reinforced bottom
- » Scrape rail made of wear-resistant high-tensile steel HB 450 » fully galvanized version
- » For light goods» Made of one piece, tempered sheet steel, tapered design
- » Wear rails on the ground prevent the bottom plate from wearing through

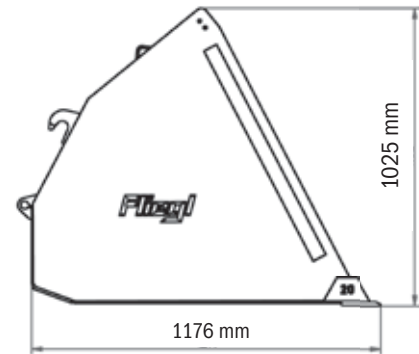

Fastened onto front loader with Euronorm quick exchange system

For attachment to Euronorm

| Art.no. | Width (bottom edge) | Content approx. | Weight approx. | Qty. |
|---------------|---------------------|--------------------|----------------|------|
| GRSFLM000003V | 1600 mm | 1.4 m ³ | 340 kg | Pcs. |
| GRSFLM000005V | 1800 mm | 1.6 m ³ | 370 kg | Pcs. |
| GRSFLM000007V | 2000 mm | 1.7 m ³ | 390 kg | Pcs. |
| GRSFLM000010V | 2200 mm | 1.9 m ³ | 430 kg | Pcs. |
| GRSFLM000012V | 2400 mm | 2.1 m ³ | 460 kg | Pcs. |
| GRSFLM000014V | 2600 mm | 2.3 m ³ | 490 kg | Pcs. |
| GRSFLM000016V | 2800 mm | 2.4 m ³ | 510 kg | Pcs. |
| GRSFLM000018V | 3000 mm | 2.6 m ³ | 580 kg | Pcs. |

For attachment to wheel or telescopic loaders

| Art.no. | Width (bottom edge) | Content approx. | Weight approx. | Qty. |
|---------------|---------------------|--------------------|----------------|------|
| GRSRTL000003V | 1600 mm | 1.4 m ³ | 350 kg | Pcs. |
| GRSRTL000005V | 1800 mm | 1.6 m ³ | 380 kg | Pcs. |
| GRSRTL000007V | 2000 mm | 1.7 m ³ | 400 kg | Pcs. |
| GRSRTL000010V | 2200 mm | 1.9 m ³ | 440 kg | Pcs. |
| GRSRTL000012V | 2400 mm | 2.1 m ³ | 470 kg | Pcs. |
| GRSRTL000014V | 2600 mm | 2.3 m ³ | 500 kg | Pcs. |
| GRSRTL000016V | 2800 mm | 2.4 m ³ | 520 kg | Pcs. |
| GRSRTL000018V | 3000 mm | 2.6 m ³ | 590 kg | Pcs. |