


## »Standard« silage grab bucket

Complete with hydraulic connections

The economical solution for removing silage! The Fliegl silage grab bucket (or fork) can be attached to front loaders (Euronorm) and wheel loaders (mounting depends on type). It is suitable for all types of silage (maize, grass) as well as manure and other bulk goods. It can also be used for easy filling of a TMR mixer. The heavy double-acting cylinders and the pointed grab arms ensure problem-free removal of material from the silo.

- » Cutting edge made of wear-resistant high-tensile steel 16 x 150 mm HB 450
- » Sturdy grab-arm linkage
- » Includes hydraulic couplers and hoses
- » Fully galvanized version (painted in the illustrations)

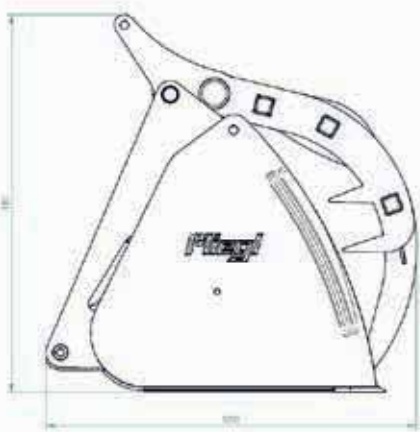

For attachment to Euronorm

Art.no.	Width	Content approx.	Weight approx.	Qty.
SGZFLM160000V	1600 mm	0.90 m <sup>3</sup>	560 kg	Pcs.
SGZFLM180000V	1800 mm	1.01 m <sup>3</sup>	590 kg	Pcs.
SGZFLM200000V	2000 mm	1.13 m <sup>3</sup>	620 kg	Pcs.
SGZFLM220000V	2200 mm	1.24 m <sup>3</sup>	650 kg	Pcs.
SGZFLM240000V	2400 mm	1.35 m <sup>3</sup>	670 kg	Pcs.

For attachment to farm, wheel or telescopic loaders

Art.no.	Width	Content approx.	Weight approx.	Qty.
SGZHRT160000V	1600 mm	0.90 m <sup>3</sup>	570 kg	Pcs.
SGZHRT180000V	1800 mm	1.01 m <sup>3</sup>	600 kg	Pcs.
SGZHRT200000V	2000 mm	1.13 m <sup>3</sup>	630 kg	Pcs.
SGZHRT220000V	2200 mm	1.24 m <sup>3</sup>	660 kg	Pcs.
SGZHRT240000V	2400 mm	1.35 m <sup>3</sup>	680 kg	Pcs.