


»Standard« volume bucket

921 mm deep, 859 mm high

- » Painted version
- » Optimum workmanship from a single piece with reinforcing profile
- » Material thicknesses: Shell plate 4 mm, side plate 5 mm, reinforced bottom
- » Heavy scrape rail made of wear-resistant high-tensile steel 150 x 16 mm HB 450
- » Tapered design ensures bulk materials slide off more easily

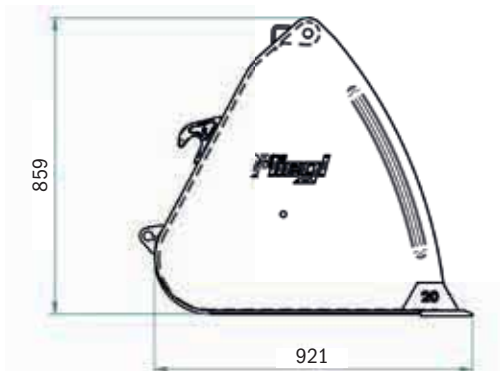

For attachment to Euronorm

Art.no.	Width (bottom edge)	Content approx.	Weight approx.	Qty.
VSSFLM000018	1800 mm	0.90 m ³	250 kg	Pcs.
VSSFLM000020	2000 mm	1.00 m ³	270 kg	Pcs.
VSSFLM000022	2200 mm	1.10 m ³	290 kg	Pcs.
VSSFLM000024	2400 mm	1.20 m ³	310 kg	Pcs.
VSSFLM000026	2600 mm	1.30 m ³	330 kg	Pcs.

For attachment to wheel or telescopic loaders

Art.no.	Width (bottom edge)	Content approx.	Weight approx.	Qty.
VSSRTL000018	1800 mm	0.90 m ³	260 kg	Pcs.
VSSRTL000020	2000 mm	1.00 m ³	280 kg	Pcs.
VSSRTL000022	2200 mm	1.10 m ³	300 kg	Pcs.
VSSRTL000024	2400 mm	1.20 m ³	320 kg	Pcs.
VSSRTL000026	2600 mm	1.30 m ³	340 kg	Pcs.